


ASC 1" x 19" SOLID LOOP LIFTER
EPOXY COATED PER ASTM A 934
AMERICAN STEEL AND AMERICAN FABRICATED
ITEM # 1000-1900

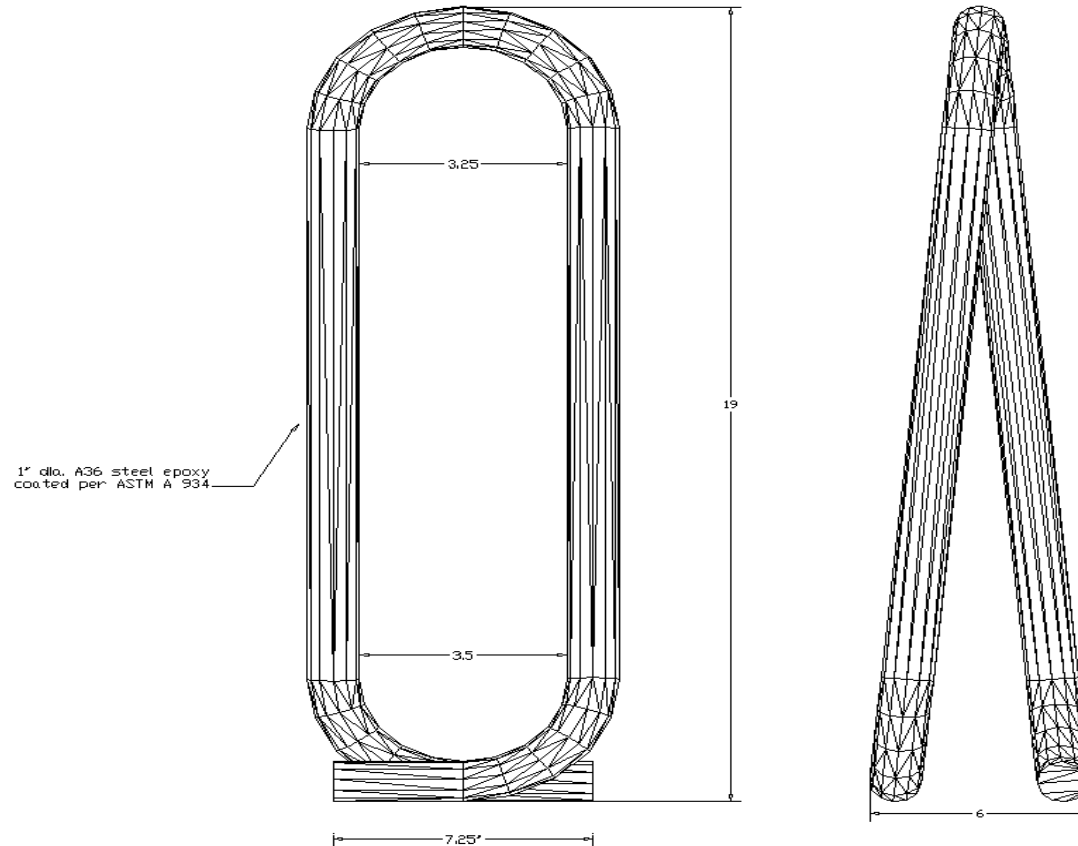

*LOAD RATINGS WERE ESTABLISHED WHEN 1"x19" SOLID LOOP LIFTER WAS EMBEDDED 14" INTO THE CONCRETE.

**LOAD RATINGS WERE ESTABLISHED WITH STEEL REINFORCEMENT CONSISTING OF ONE 1" REBAR 42" LONG THROUGH THE PART

LOAD RATINGS COMPLY WITH OSHA 1926.704 (C) 4:1 SAFETY FACTOR

CONCRETE STRENGTH	TENSION STRAIGHT UP
4,000 PSI	*17,750 POUNDS NON-REINFORCED CONCRETE
4,000 PSI	**18,750 POUNDS WITH STEEL REINFORCEMENT



American Step Company, Inc.
P. O. Box 137
830 East Broadway
Griffin, GA 30224-0137

800-988-STEP
770-467-9844 (OFFICE)
770-467-8011 (FAX)
www.americanstep.com