


**ASC 1/2" x 6" PULLING/LIFTING IRON
 WITH GALVANIZED CONDUIT COVERING
 AMERICAN STEEL AND AMERICAN FABRICATED
 FOR USE ONLY IN PROPERLY STEEL REINFORCED CONCRETE
 NOT FOR USE IN NON REINFORCED CONCRETE
 ITEM # 500-600**



LOAD RATINGS WERE ESTABLISHED WHEN 1/2" X 6" PULLING/LIFTING IRON WAS EMBEDDED 4.25" INTO 4,000 PSI CONCRETE.

LOAD RATINGS COMPLY WITH OSHA 1926.704 (C) 4:1 SAFETY FACTOR

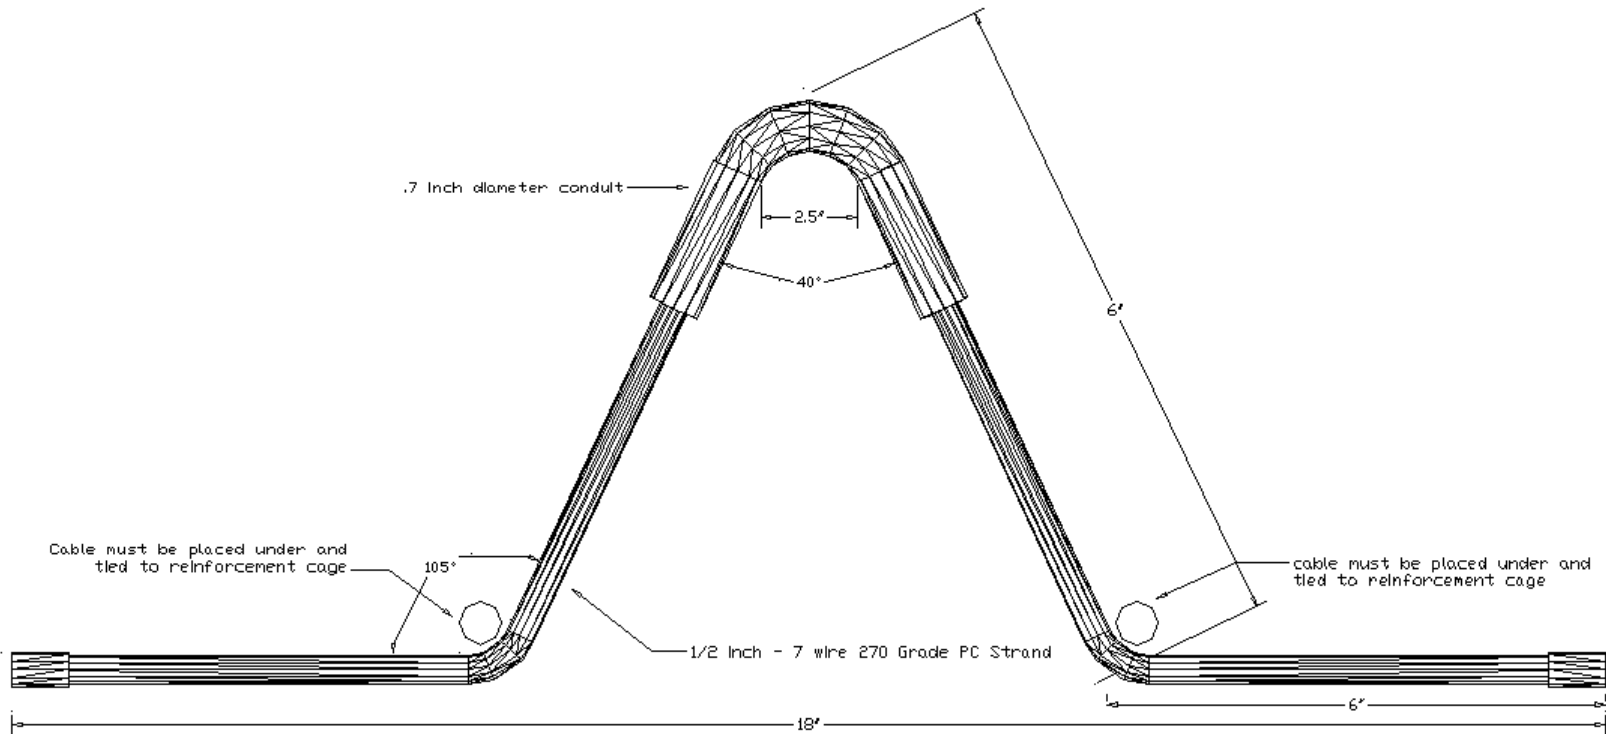

CONCRETE STRENGTH	TENSION STRAIGHT UP
4,000 PSI	2,800 POUNDS

American Step Company, Inc.
 P. O. Box 137
 830 East Broadway
 Griffin, GA 30224-0137

800-988-STEP
770-467-9844 (OFFICE)
770-467-8011 (FAX)
www.americanstep.com