


ASC 3/8" x 5 1/2" x 8 1/2" SOLID LOOP LIFTER

EPOXY COATED PER ASTM A 934

AMERICAN STEEL AND AMERICAN FABRICATED

ITEM # 375-850

PATENT # D615,849

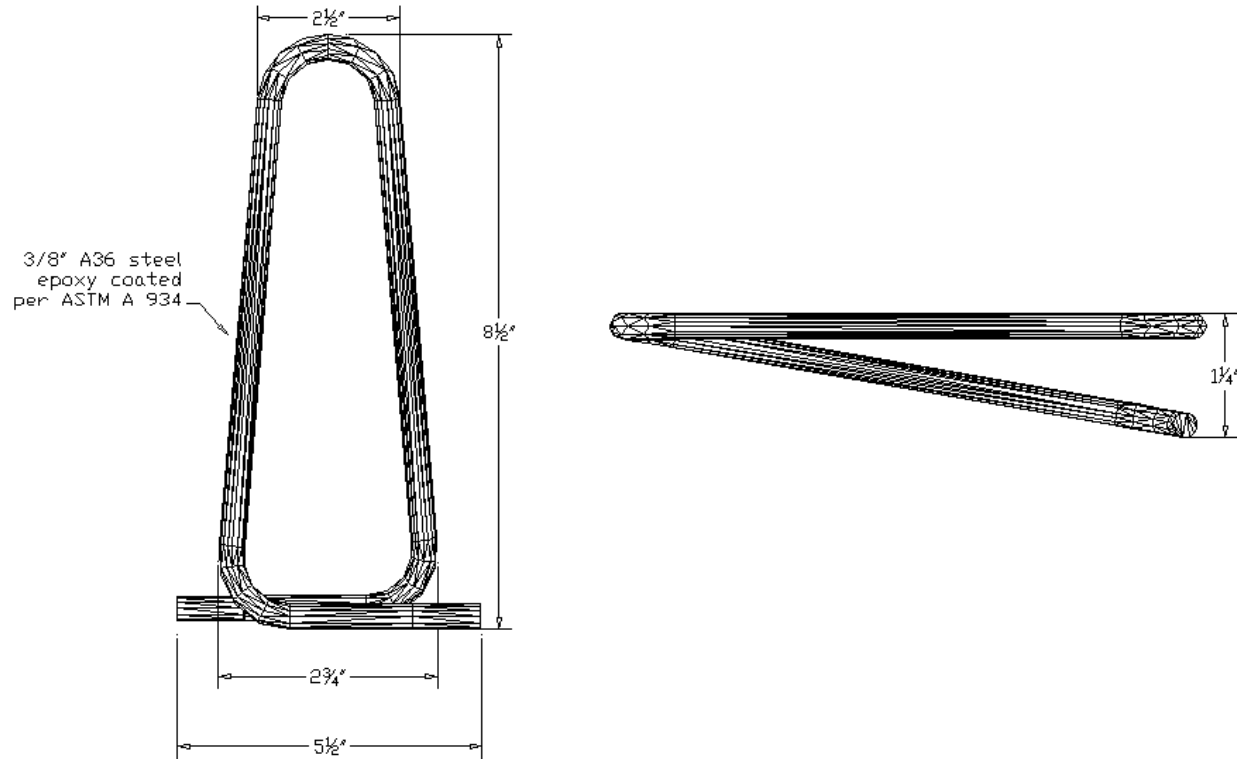

LOAD RATINGS WERE ESTABLISHED WHEN 3/8"x5 1/2" x 8 1/2" SOLID LOOP LIFTER WAS EMBEDDED:
 (1) 7" EMBEDMENT INTO THE CONCRETE (2) 4" EMBEDMENT IN 4" PAD AND 6" EMBEDMENT IN A 6" PAD

LOAD RATINGS COMPLY WITH OSHA 1926.704 (c) 4:1 SAFETY FACTOR

CONCRETE STRENGTH	TENSION STRAIGHT UP	SHEAR 90 DEGREES
1000 PSI	3250 POUNDS (1)	NOT TESTED
4000 PSI	4000 POUNDS (1)	4000 POUNDS
4230 PSI	2625 POUNDS (2)	NOT TESTED



American Step Company, Inc.
 P. O. Box 137
 830 East Broadway
 Griffin, GA 30224-0137

800-988-STEP
 770-467-9844 (OFFICE)
 770-467-8011 (FAX)
www.americanstep.com