


**3/8" x 5.5"**  
**ASC PULLING/LIFTING IRON**  
**AMERICAN STEEL AND AMERICAN FABRICATED**  
**ITEM # 375-550**

for use only in properly steel reinforced concrete  
 not for use in non reinforced concrete

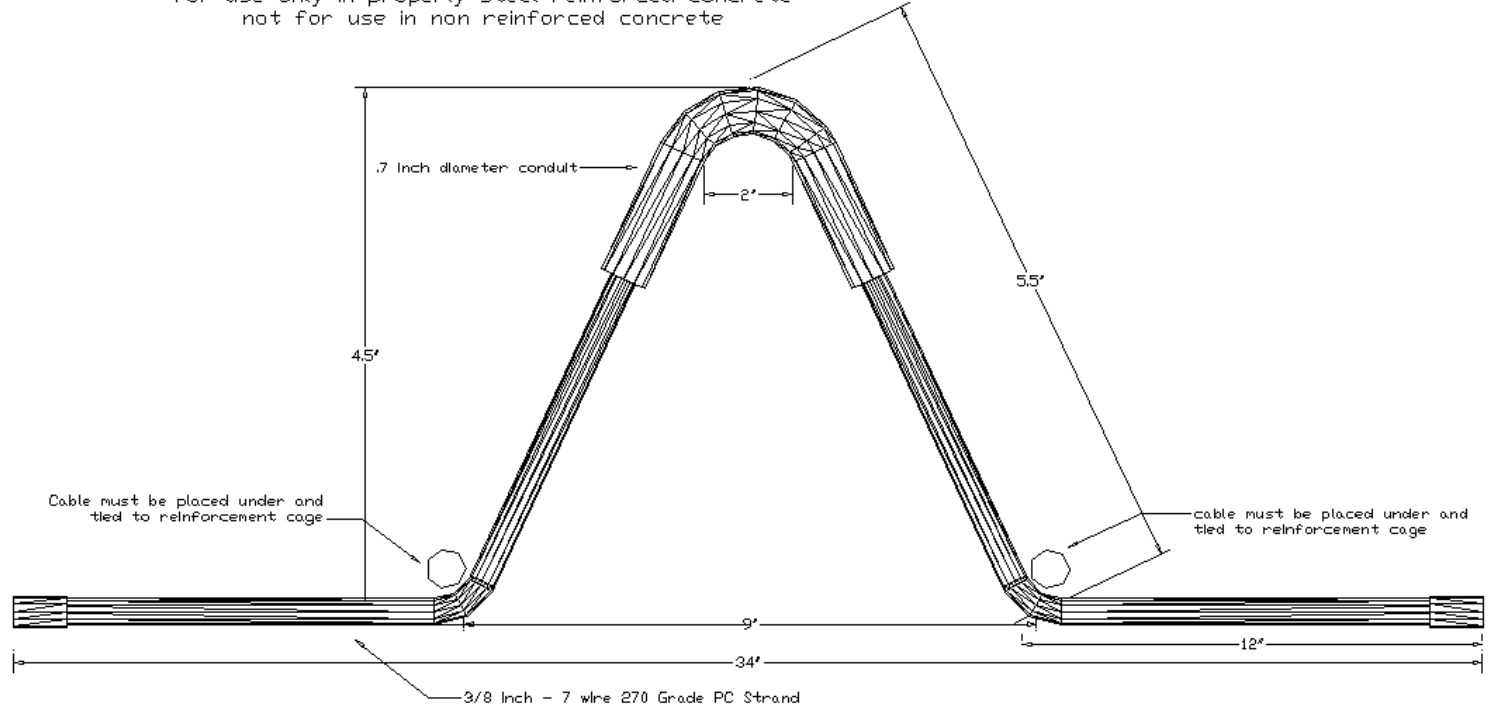

LOAD RATINGS WERE ESTABLISHED WHEN PULLING/LIFTING IRON WAS EMBEDDED  
 3" IN 4000 PSI CONCRETE WITH STEEL REINFORCEMENT OF 1/2" GR. 60 A615 REBAR  
 ON 12" X 12" SPACING THAT THE HAUNCHES OF THE PULLING IRON WERE SECURELY UNDER.

**LOAD RATINGS COMPLY WITH OSHA 1926.704 (c) 4:1 SAFETY FACTOR**



<b>CONCRETE STRENGTH</b>	<b>TENSION STRAIGHT UP</b>
<b>4000 PSI</b>	<b>5,000 POUNDS</b>

American Step Company, Inc.  
 P. O. Box 137  
 830 East Broadway  
 Griffin, GA 30224-0137

800-988-STEP  
 770-467-9844(OFFICE)  
 770-467-8011 (FAX)  
 www.americanstep.com