


**3/4" x 12" x 14"**  
**ASC UTILITY ANCHOR**  
**EPOXY COATED PER ASTM A 934**  
**AMERICAN STEEL AND AMERICAN FABRICATED**  
**ITEM # 750-120-140**



LOAD RATINGS COMPLY WITH OSHA 1926.704 (c) 4:1 SAFETY FACTOR CONCRETE STRENGTH STRUCTURE TESTED IN	TENSION STRAIGHT UP LOAD RATINGS
8" THICK PAD 44" X 44" OF 4,000 PSI CONCRETE WITH ONE 36" LONG 1/2" GRADE 60 REBAR – PART EMBEDDED 5 1/2" IN CONCRETE	6,625 POUNDS
10" THICK PAD 44" X 44" OF 4,000 PSI CONCRETE WITH ONE 36" LONG 1/2" GRADE 60 REBAR – PART EMBEDDED 7" IN CONCRETE	8,750 POUNDS
12" THICK PAD 44" X 44" OF 4,000 PSI CONCRETE WITH ONE 36" LONG 1/2" GRADE 60 REBAR – PART EMBEDDED 9" IN CONCRETE	11,125 POUNDS
10" THICK WALL 12" DEEP 4,000 PSI CONCRETE WITH NO STEEL PART EMBEDDED 9" IN CONCRETE	8,000 POUNDS

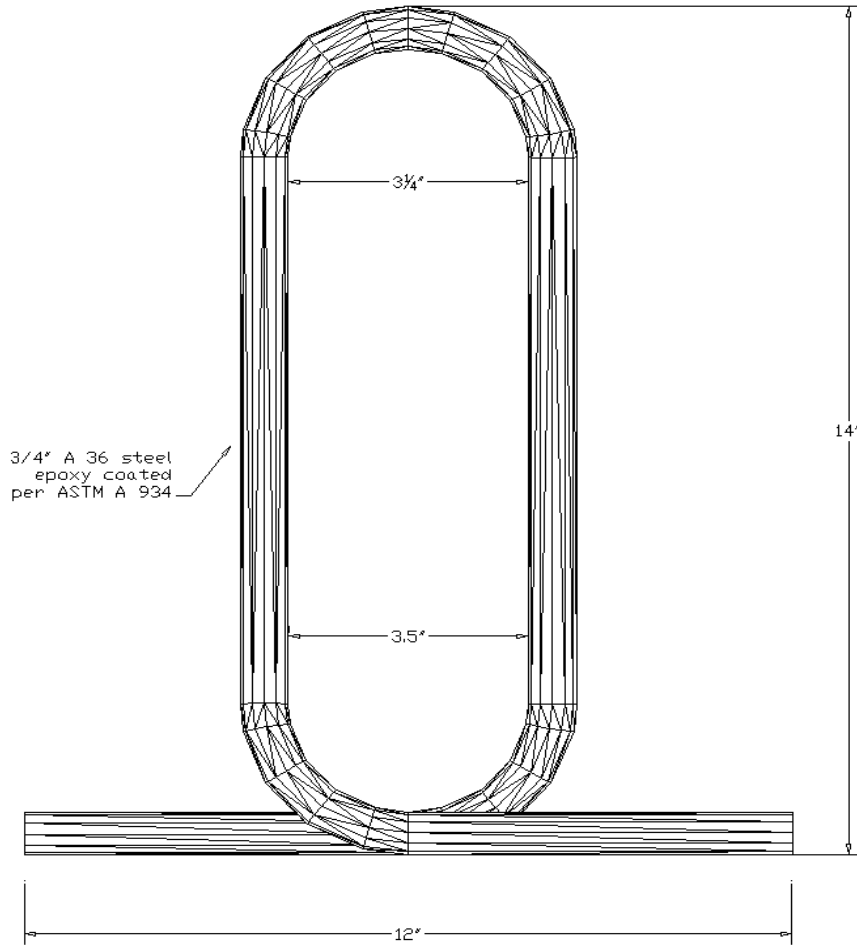

American Step Company, Inc.  
P. O. Box 137  
830 East Broadway  
Griffin, GA 30224-0137

800-988-STEP  
770-467-9844 (OFFICE)  
770-467-8011 (FAX)  
www.americanstep.com